



Universal Controller "UC"

TECHNICAL DATA

Mechanical Dimensions

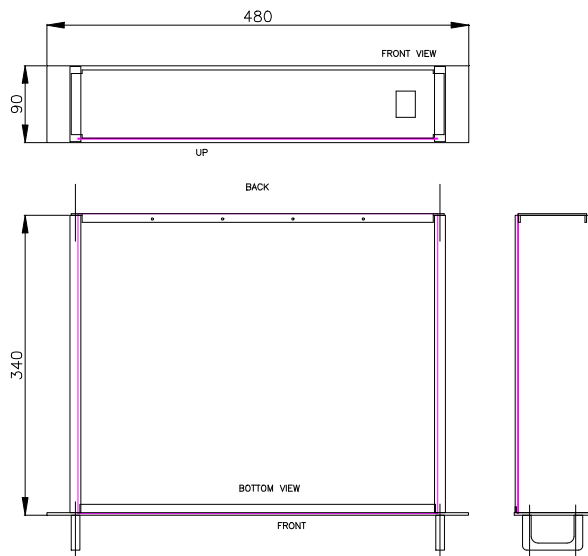

Terminal Lay-out

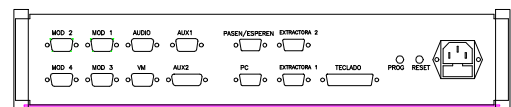

Technical Specifications

Product description	Bingo Peripherals real-time Controller
Power Supply	100-240 V AC $\pm 10\%$, 50-60 Hz
Power Consumption	40 W
Isolation Type	Class I (Grounding needed)
External Dimensions (W x H x D)	480x90x340 mm (SUBRACK 19")
Weight	4.00 kg
Operating Temperature	0 to 55 °C
Humidity Rating	10% to 90% (non-condensing)
Cooling System	Free convection
Security Standards	CE

Input / Output Terminals

Signal	Connector
BLOWERS 1 & 2	D-sub 9 pin female
BCS (RS-232)	D-sub 9 pin male
VIDEO MATRIX	D-sub 9 pin female

Signal	Connector
MCA	D-sub 9 pin female
AUX1	D-sub 15 pin female
AUX2	D-sub 9 pin female
MODULES 1-4	D-sub 9 pin female

Accessories

Included Accessories	
Technical Handbook	1
Power Supply cable with SCHUKO plug	1

Optional Accessories
VM communication cable