


Video Sound Matrix "VSM"

TECHNICAL DATA

Mechanical Dimensions

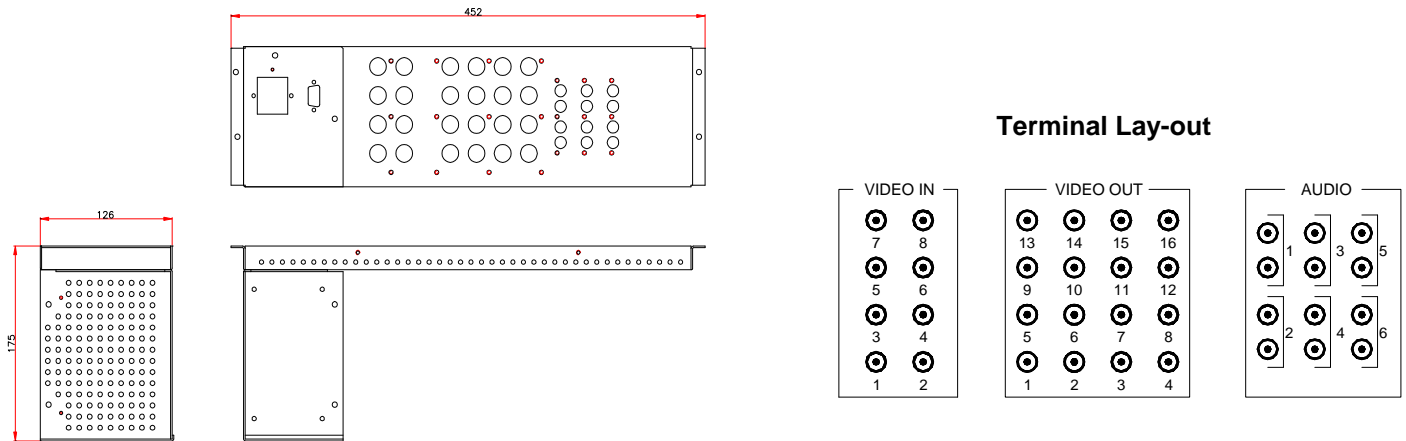

Technical Specifications

Product Description	Video Multiplexer and Sound Control
Video Signal	PAL/NTSC/SECAM/HDTV
Video Inputs	8 ch. with Gain Control (normal 1Vpp, max. 2Vpp)
Video Outputs	16 ch. with Gain (normal 1Vpp, max. 2Vpp) and Phase Control (trimmer)
Sound Inputs	6 ch. Stereo Audio channels
Sound Outputs	6 ch. Control ON/OFF
Isolation between channels	80 dB to 5 MHz
Bandwidth	100 MHz
Power Supply	100-240 V AC $\pm 10\%$, 50-60 Hz
Power Consumption	55 W
Isolation Type	Class I (Grounding needed)
External Dimensions (W x H x D)	452x126x175 mm (SUBRACK 19")
Weight	3.50 kg
Operating Temperature	0 to 55 °C
Humidity Rating	10% to 90% (non-condensing)
Cooling System	Free convection
Security Standards	CE

Input / Output Terminals

Signal	Connector	Signal	Connector
BCS (RS-232)	D-sub 9 pin male	Video and Sound Input/Output	BNC

Accessories

Included Accessories	
Technical Handbook	1
Power Supply cable with SCHUKO plug	1